

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/061749 A2

(51) International Patent Classification⁷: **C22C 38/04**,
38/12

(74) Agents: **AOKI, Atsushi** et al.; A. Aoki, Ishida & Associates, Toranomon 37 Mori Bldg., 5-1, Toranomon 3-chome, Minato-ku, Tokyo 1058423 (JP).

(21) International Application Number:
PCT/JP2004/019468

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
17 December 2004 (17.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-423329 19 December 2003 (19.12.2003) JP

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **NIPPON STEEL CORPORATION** [JP/JP]; 6-3, Otemachi 2-chome, Chiyoda-ku, Tokyo 1008071 (JP).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **ASAHI, Hitoshi** [JP/JP]; c/o Nippon Steel Corporation, Technical Development Bureau, 20-1, Shintomi, Futtsu-shi, Chiba 2938511 (JP). **HARA, Takuya** [JP/JP]; c/o Nippon Steel Corporation, Technical Development Bureau, 20-1, Shintomi, Futtsu-shi, Chiba 2938511 (JP).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: STEEL PLATES FOR ULTRA-HIGH-STRENGTH LINEPIPERES AND ULTRA-HIGH-STRENGTH LINEPIPERES HAVING EXCELLENT LOW-TEMPERATURE TOUGHNESS AND MANUFACTURING METHODS THEREOF

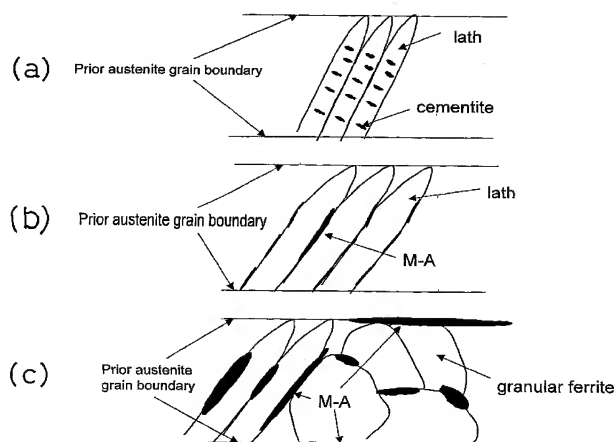

(57) Abstract: Ultra-high-strength linepipes having excellent low-temperature toughness manufactured by welding together the edges of steel plates comprising C of 0.03 to 0.07 mass%, Si of not more than 0.6 mass%, Mn of 1.5 to 2.5 mass%, P of not more than 0.015 mass%, S of not more than 0.003 mass%, Ni of 0.1 to 1.5 mass%, Mo of 0.15 to 0.60 mass%, Nb of 0.01 to 0.10 mass%, Ti of 0.005 to 0.030 mass%, Al of not more than 0.06 mass%, one or more of required amounts of B, N, V, Cu, Cr, Ca, REM (rare-earth metals) and Mg, with the remainder consisting of iron and unavoidable impurities and having a (Hv-ave)/(Hv-M) ratio between 0.8 and 0.9 at $2.5 \leq P \leq 4.0$, wherein Hv-ave is the average Vickers hardness in the direction of the thickness of the base metal and Hv-M is the martensite hardness depending on C-content ($Hv-M = 270 + 1300C$) and a tensile strength TS-C between 900 MPa and 1100 MPa; $P = 2.7C + 0.4Si + Mn + 0.8Cr + 0.45(Ni + Cu) + (1 + \beta)Mo - 1 + \beta$ ($\beta = 1$ when $B \geq 3$ ppm and $\beta = 0$ when $B < 3$ ppm).

WO 2005/061749 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.